2012

2012 PRODUCT CATALOG
FOGCO SYSTEMS, INC.

Fogco provides integrated solutions for commercial and industrial climate control projects including humidification, dust control, odor control, and outdoor cooling. Through innovative product development and an ongoing commitment to customer service, Fogco Systems, Inc. has established itself as a leading manufacturer in the mist and fog industries. Founded in 1989, the company designs and manufactures high pressure fog systems for customers worldwide. Fogco also offers full system design and system specifications. From simple direct drive units to complex custom control systems, Fogco has a solution for your climate control needs.

INDEX

3-4 CONTROLLER

FOGCOntroller 3

FOGcenter 4

5-9 PUMP DESIGN

Custom 5

Premium 6

Professional 7

Certified 8-9

10 FAN DESIGN

Revolution 10

11-12 NOZZLES & ADAPTERS

Brass / Stainless Steel 11

Nozzle Adapters 12

13-19 TUBING & FITTINGS

Stainless Steel 13-14

Nylon / Slip Lok 15-16

Copper / Brass 17-19

20-25 FILTERS, KITS & ACCESSORIES

Filters & Accessories 20

Pre-packaged Kits 21-24

Valves & Miscellaneous 25

CONTROLLER
FOGCONTROLLER, SENSOR & CABLING

+ Designed Specifically For Fog System Control
+ 2 Zone Microprocessor With Multiple I/O
+ Expandable To Control Additional Zones
+ Operates With 24VAC Power Supply And Output
+ 5 Operating Modes Including Proprietary 'Comfort' Mode
+ 5 independent Relays With Programmable Delay
+ Allows For The Integration of External Fans
+ Controls Water Supply, Zone Valves, And Pump
+ Automatic Pressure Switch Safety Cut-Off
+ Fully Calibrated Sensor With Digital Output
+ Private Labeling and Custom Programming Available

SPECIFICATIONS

Model	Description	Size
92910	FOGCOntroller 2 Zone Microprocessor	6" X 3.5" X 2"
92909	Remote Temperature/Humidity Sensor	4" X 2" X 1"
92908	4 Pin Connector	N / A
92907	4 Wire Shielded Instrumentation Cable	N / A
94206	22 Gauge 6 Conductor Signal Cable	N / A
94207	18 Gauge 2 Conductor Power Supply Cable	N / A

CONTROLLER
FOGCENTER, SENSOR & CABLING

+ Digital Processing Multi-Purpose Controller
+ Designed Specifically For Fog System Control
+ Operates With 24 VAC Power Supply And Output
+ Multiple Operating Modes, 10 Zone Control
+ 11 Input Terminals; 12 Output terminals
+ Pressure And Temperature Safety Control
+ Pressure Transducer Input Terminal
+ Displayed Alarm and Maintenance Messages
+ MECBUS Master and Slave Function
+ Serial Interface, LAN, 200 MHz 64MB RAM USB

SPECIFICATIONS

Model	Description	Nozzles*
92911	FogCenter Multi-Purpose Controller	9" X 6" X 2"
92912	FogCenter Temp/Hum Sensor	5" X 5" x 2"
92913	FogCenter Sensor Connector Cable	N / A
94206	22 Gauge 6 Conductor Signal Cable	N / A
94207	18 Gauge 2 Conductor Power Supply Cable	N / A

PUMP DESIGN
CUSTOM SERIES 50Hz / 60Hz

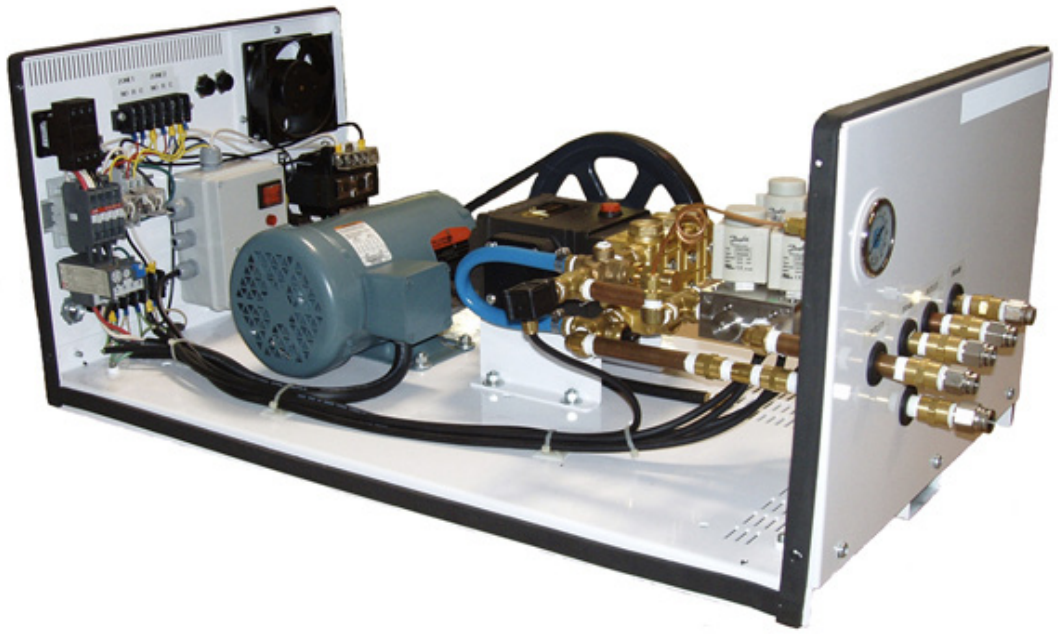

Fogco has developed a series of custom pump designs to account for a large variety of specialty applications. These pumps can be built for any flow capacity, any voltage, any quantity of zones and for any cooling, humidification, dust/odor control, or special effects application. This special range of pumps can be controlled by a variety of methods including temperature, humidity, time, motion or a combination of these options. They can be built to accommodate remote operational control as well.

By incorporating one of these custom pumps with the latest Fogco innovations, the Revolutionrange and the FOGCOntroller, the entire system can be completely integrated allowing for simple and effective control of the misting system.

Enclosed housing design includes:

+ Small enclosed housing design :26" L X 16" W X 12" H
+ Large enclosed housing design: 37" L X 19" W X 18" H
+ Patented pulley drive pump design
+ Vented cover with exhaust fan
+ Rust proof powder coated enclosure
+ Table top open frame stand design : 42" L X 24" W X 58" H
+ Custom Uni-strut skid design: 96" L X 48" W X 72" H

Open frame and Uni-strut skid design includes:

+ Zinc coated or powder coated metal
+ Separate electronics control box

All Custom Design Units Can Include:

+ Rated operating pressure 1000 + psi
+ Multi zone capability 1-10
+ Multi control capability including time, temperature, humidity
+ Remote control capability
+ Variable frequency drive capability
+ Integration with the Revolution fan
+ Integration with the FOGCOntroller
+ Oversized bare pump for efficient operation
+ High efficiency or inverter duty motors
+ Pump operating RPM range from 100-1800
+ Low pressure or high pressure safety switch
+ Analog hour meter
+ Adjustable pressure regulator with bypass
+ Electric inlet, zone, or drain valves
+ Glycerin filled pressure gauge; 0-2000 psi
+ Thermal relief valve
+ Oil drain tube
+ Voltages from 115V to 575V
+ 1PH or 3Ph
+ Three year warranty

PUMP DESIGN
PREMIUM SERIES 60Hz

+ Patented pulley drive pump design
+ Rated operating pressure 1000 psi
+ Rust proof powder coated enclosure
+ 26" L X 16" W X 12" H
+ Vented cover with exhaust fan
+ Oversized bare pump for efficient operation
+ Low RPM; 500-1400
+ Low pressure safety switch
+ Hour meter
+ Adjustable pressure regulator with bypass
+ Electric inlet solenoid valve
+ Glycerin filled pressure gauge; 0-2000 psi
+ Thermal relief valve
+ Oil drain tube
+ 115V and 230V
+ Three year warranty

SPECIFICATIONS

Model	GPM	Nozzles*	HP	Volts/Phase	Amps	RPM	Weight lbs.
5050116	0.5	8-16	0.5	115/1	8.5	500	90
5050216	0.5	8-16	0.5	230/1	4.3	500	90
5100116	1	16-32	1	115/1	14	500	110
5100216	1	16-32	1	230/1	7	500	110
5150116	1.5	25-50	1	115/1	14	750	110
5150216	1.5	25-50	1	230/1	7	750	110
5200216	2	33-66	1.5	230/1	10.2	1000	118
5300216	3	50-100	3	230/1	15	1400	130

* Based on .012 nozzles

PUMP DESIGN
PROFESSIONAL SERIES 60Hz

+ Direct drive pump design
+ Rated operating pressure 1000 psi
+ 22" L X 8" W X 10" H
+ 4 pole motor 1750 RPM
+ Low pressure safety switch
+ Analog hour meter
+ Adjustable pressure regulator with bypass
+ Electric inlet solenoid valve
+ Glycerin filled pressure gauge; 0-2000 psi
+ Thermal relief valve
+ 115V and 230V
+ Three year warranty

SPECIFICATIONS

Model	GPM	Nozzles*	HP	Volts/Phase	Amps	Weight Lbs
6025116	0.25	4-8	0.5	115/1	7.4	55
6025216	0.25	4-8	0.5	230/1	3.7	55
6050116	0.5	8-16	0.5	115/1	7.4	55
6050216	0.5	8-16	0.5	230/1	3.7	55
6100116	1	16-32	1	115/1	14	60
6100216	1	16-32	1	230/1	7	60
6150116	1.5	25-50	1	115/1	14	63
6150216	1.5	25-50	1	230/1	7	63
6200216	2	50-100	1.5	230/1	8.7	65

* Based on .012 nozzles

PUMP DESIGN
CERTIFIED SERIES 50Hz

+ Pulley Drive
+ Patented pump design
+ Rated operating pressure 70 BAR
+ Rust proof powder coated enclosure
+ 66cm L X 41cm W X 30cm H
+ Vented cover with exhaust fan
+ Oversized bare pump for efficient operation
+ Low RPM; 500-1400
+ Analog hour meter
+ Adjustable pressure regulator with bypass
+ Electric inlet solenoid valve
+ Glycerin filled pressure gauge; 0-140 BAR
+ Thermal relief valve
+ Oil drain tube
+ 230V
+ Three year warranty

SPECIFICATIONS

Model	LPM	Nozzles*	HP	Volts/Phase	Amps	RPM	Weight Kg
7200215	2	8-16	1	230/1	7.3	490	50
7400215	4	16-32	1	230/1	7.3	490	50
7800215	8	33-66	1.5	230/1	11.2	930	54
7120215	12	50-100	3.0	230/1	13	1400	59

* Based on .012 nozzles

PUMP DESIGN
CERTIFIED SERIES 50Hz

+ Direct Drive
+ Rated operating pressure 70 BAR
+ 56cm L X 20cm W X 25cm H
+ 4 pole motor 1450 RPM
+ Adjustable pressure regulator with bypass
+ Electric inlet solenoid valve
+ Glycerin filled pressure gauge; 0-140 BAR
+ Thermal relief valve
+ 230V
+ Three year warranty

SPECIFICATIONS

Model	LPM	Nozzles*	HP	Volts/Phase	Amps	Weight Kg
8100215	1	4-8	1	230/1	7.3	22
8200215	2	8-16	1	230/1	7.3	25
8300215	3	13-26	1	230/1	7.3	27
8400215	4	16-32	1	230/1	7.3	27
8700215	7	30-60	1.5	230/1	11.2	29

* Based on .012 nozzles

FAN DESIGN
REVOLUTION™ 50Hz / 60Hz

- Quiet Axial Fan
- 2100 CFM
- Available in 115/1 or 230/1
- ¼ HP Motor
- Powder Coated Housing
- 10 Nozzle Stainless Steel Ring
- Accepts 10/24 Nozzles and Adapters
- Ceiling Mount or Portable Stand Mount
- Improved Fog System Performance
- Vented Air Stream
- Coverage up to 2500 Square Feet
- 360 degree Distribution
- 5 Times the Coverage of a Line System
- Three year warranty

SPECIFICATIONS

Model	Mount	HP	Volts/Phase	Amps	Dimensions	Weight
93800	Ceiling	.25	115/1	1.9	24 X 10	39
93820	Ceiling	.25	230/1	0.9	24 X 10	25
93900	Stand	.25	115/1	1.9	28 X 85	66
93920	Stand	.25	230/1	0.9	28 X 85	45

NOZZLES & ADAPTERS
BRASS/STAINLESS STEEL

+ 10/24 Thread
+ Droplets From 1.2 to 47.9 Microns
+ 1000 PSI Rated Operating Pressure
+ O-Ring Seal Design

Standard Design

+ Brass/Stainless Material
+ .008" to .020" Orifice Sizes
+ .020 to .055 GPM Flow Rates

Cleanable Design

+ Brass/Stainless Or All Stainless Material
+ .006" to .020" Orifice Sizes
+ Includes Anti Drip Adapter
+ .010 to .045 GPM Flow Rates

NOZZLES

Model	Description	Orifice	GPM/LPM	O-Ring	Droplet Range*
93508	Brass/Stainless Standard	.008"/.2mm	.020/.076	Red	1.4µ-37.9µ; MD = 12.7µ
93512	Brass/Stainless Standard	.012"/.3mm	.029/.110	Black	1.6µ-39.1µ; MD = 13.1µ
80450	Brass/Stainless Standard	.016"/.4mm	.044/.167	Brown	3.8µ-47.9µ; MD = 13.8µ
93520	Brass/Stainless Standard	.020"/.5mm	.055/.208	Green	9.5µ-49.9µ; MD = 15.2µ
95031	Brass/Stainless Cleanable	.006"/.15mm	.010/.037	Yellow	1.1µ-35.7µ; MD = 11.3µ
95037	Brass/Stainless Cleanable	.008"/.2mm	.016/.060	Red	1.4µ-37.9µ; MD = 12.7µ
95038	Brass/Stainless Cleanable	.012"/.3mm	.025/.095	Black	1.6µ-39.1µ; MD = 13.1µ
95039	Brass/Stainless Cleanable	.016"/.4mm	.036/.136	Brown	3.8µ-47.9µ; MD = 13.8µ
95040	Brass/Stainless Cleanable	.020"/.5mm	.045/.170	Green	9.5µ-49.9µ; MD = 15.2µ
95032	All Stainless Cleanable	.006"/.15mm	.010/.037	Yellow	1.1µ-35.7µ; MD = 11.3µ
95033	All Stainless Cleanable	.008"/.2mm	.016/.060	Red	1.4µ-37.9µ; MD = 12.7µ
95034	All Stainless Cleanable	.012"/.3mm	.025/.095	Black	1.6µ-39.1µ; MD = 13.1µ
95035	All Stainless Cleanable	.016"/.4mm	.036/.136	Brown	3.8µ-47.9µ; MD = 13.8µ
95036	All Stainless Cleanable	.020"/.5mm	.045/.170	Green	9.5µ-49.9µ; MD = 15.2µ

* Based on 1000 PSI Based ON Doppler Testing MD = Mean Diameter µ = Micron or 1 millionth of a meter

NOZZLE ADAPTERS

+ 10/24 Threads
+ Nozzle Plugs
+ Nozzle extensions
+ Drain Valves
+ Anti Drip Adapters
+ Nozzle Clusters
+ Swivel Adapters

ADAPTERS

Model	Description	Size
93505	Brass Nozzle Plug	10/24 UNC
93503	Auto Drain Valve	10/24 UNC/ 3/8" O.D.
93501	Brass 1.5" Nozzle Extension	10/24 UNC/ 3/8" O.D.
92808	Copper 12" Nozzle Extension	10/24 UNC X 10/24 UNC
93597	Copper 6" Nozzle Extension	10/24 UNC X 10/24 UNC
92519	Brass Nozzle Adapter	1/8" MNPT X 10/24 UNC
92520	Brass Nozzle Adapter	12/24 UNC X 10/24 UNC
93019	Stainless 5 Nozzle Cluster	10/24 UNC
95041	Nozzle Swivel Adapter	10/24 UNC X 10/24 UNC
92100	Nozzle Removal Tool	NA
10252	Black Nozzle O-ring	.240" O.D X .160" I.D.

TUBING & FITTINGS
STAINLESS STEEL

+ Ultimate in High Quality
+ 300 Series Pre-fabricated Tubing
+ Precise and Consistent Robotic Weld
+ Proprietary Nozzle Fitting
+ Available in 10' and 20' Lengths
+ Available in 3/8" and ½" Diameter
+ Standard Nozzle Spacing 18", 24", and 30"
+ Custom Configurations Available
+ 3000 PSI Operating Pressure
+ Acceptable for all Treated Water Systems
+ All Stainless Steel Compression Fittings
+ Double Ferruled Design
+ Wide Fitting Selection
+ Three Year Warranty

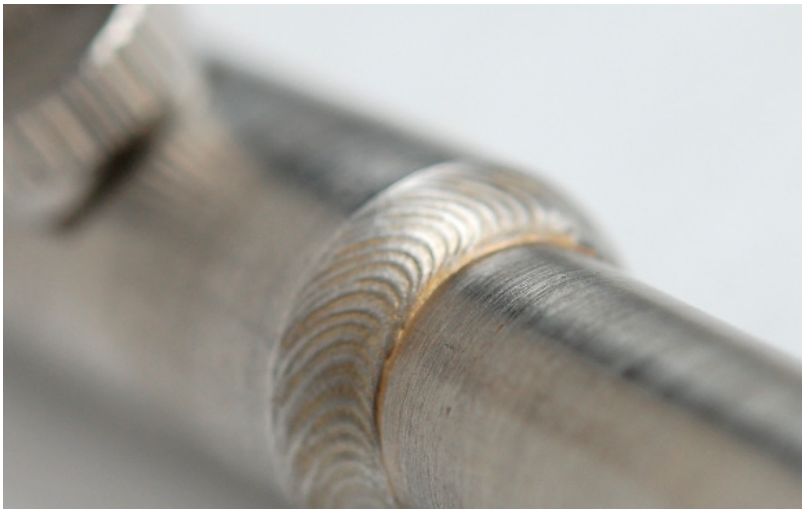

STAINLESS TUBING

Model	Description	Size
92900	Blank Feed Line	20' Length, 3/8" O.D.
92951	Prefabricated Tubing	19.5' Length, 3/8" O.D., 18" Nozzle Spacing
92952	Prefabricated Tubing	20' Length, 3/8" O.D., 24" Nozzle Spacing
92953	Prefabricated Tubing	20' Length, 3/8" O.D., 30" Nozzle Spacing
93080	Prefabricated Tubing	10' Length, 3/8" O.D., 24" Nozzle Spacing
93081	Prefabricated Tubing	10' Length, 3/8" O.D., 30" Nozzle Spacing
92839	Blank Feed Line	20' Length, 1/2" O.D.
93577	Prefabricated Tubing	19.5' Length, 1/2" O.D., 18" Nozzle Spacing
93578	Prefabricated Tubing	20' Length, 1/2" O.D., 24" Nozzle Spacing
93579	Prefabricated Tubing	20' Length, 1/2" O.D., 30" Nozzle Spacing

COMPRESSION FITTINGS

Model	Description	Size
92819	Union	3/8" X 3/8"
92860	Union	1/2" X 1/2"
92835	Reducing Union	1/2" X 3/8"
92836	3 Way T	3/8" X 3/8" X 3/8"
92862	3 Way T	1/2" X 1/2" X1/2"
92837	Union Elbow	3/8" X 3/8"
92863	Union Elbow	1/2" X 1/2"
92869	Male Adapter	1/2" X 3/8" NPT
92852	Ccompression Cap	3/8"
92874	Compression Cap	1/2"

NYLON/SLIP LOK

+ Ultimate in Convenience and Versatility
+ Push to Connect Fittings
+ No Assembly Tools Required
+ High Quality Slip Lok Design
+ Tubing Available in 24" and 30" Straight Lengths
+ Tubing Available in 50', 100', and 500' Coils
+ Tubing Available in 3/8" and ¼" Diameter
+ Fittings Available in ¼", 3/8", and ½"
+ 1000 PSI Operating Pressure
+ Nickel Plated Brass Fittings
+ Locking Ferruled Design
+ Fittings Can Be Removed and ReUsed
+ One Year Warranty

NYLON TUBING

Model	Description	Size	Length	PSI/BAR
93072	Black Nylon Roll	.375" O.D. X .225" I.D.	500 Feet	1000/70
90063	Black Nylon Roll	.375" O.D. X .225" I.D.	100 Feet	1000/70
92700	Black Nylon Roll	.375" O.D. X .225" I.D.	50 Feet	1000/70
92713	Black Nylon Straight	.375" O.D. X .225" I.D.	30 Inches	1000/70
92990	Black Nylon Straight	.375" O.D. X .225" I.D.	24 Inches	1000/70
10128	Black Polyethylene Coil	.375" O.D. X .250" I.D.	Per Foot	150/10
92853	Black Polyethylene Coil	.500" O.D. X .375" I.D.	Per Foot	150/10

SLIP LOK FITTINGS

Model	Description	Size
92630	Slip Lok T	3/8" X 3/8" X 10/24
92702	Slip Lok Coupling	3/8" X 3/8"
92703	Slip Lok Elbow	3/8" X 3/8"
92711	Slip Lok 4 Way Cross	3/8" X 3/8" X 3/8" X 3/8"
92704	3 Way T	3/8" X 3/8" X 3/8"
92544	Hose Adapter	3/4" FGHT X 1/2" FNPT
92712	Slip Lok X Male Adapter	3/8" X 1/4"
93163	Slip Lok X Male Adapter	3/8" X 1/8"
92707	Slip Lok X Male Adapter	3/8" X 3/8"
92708	Slip Lok X Male Adapter	3/8" X 1/2"
92854	Slip Lok X Male Adapter	1/2" X 3/8"
92855	Slip Lok X Male Adapter	1/2" X 1/2"
92507	Slip Lok X Female Adapter	3/8" X 1/4"
92709	Slip Lok X Female Adapter	3/8" X 3/8"
92923	Slip Lok Mistscaping Adapter	3/8" X 10/24
93225	Mistscaping Riser	3/8" Slip Lok T X 10/24
92706	Brass Slip Lok End Plug	3/8" O.D.
92714	Vinyl Coated Steel Clamp	3/8" I.D.
93328	Vinyl Coated Steel Clamp	1/4" I.D.
92680	Vinyl Coated Steel Clamp	1/2" I.D.
94630	Slip Lok T	1/4" X 1/4" X 10/24
94706	Slip Lok End Plug	1/4" O.D.
94707	Slip Lok X Male Adapter	1/4" X 3/8"
92927	Slip Lok O-Ring	

TUBING & FITTINGS
COPPER/BRASS

+ Ultimate On-Site Customization
+ ACR Rigid Pre-fabricated Copper Tubing
+ Precise and Consistent Solder
+ Proprietary Nozzle Fitting
+ Available in 10' Lengths
+ Available in 3/8" Diameter
+ Standard Nozzle Spacing 18", 24", and 30"
+ Custom Configurations Available
+ 1000 PSI Operating Pressure
+ All Brass Compression Fittings
+ Double Ferruled Design
+ Wide Fitting Selection
+ One Year Warranty

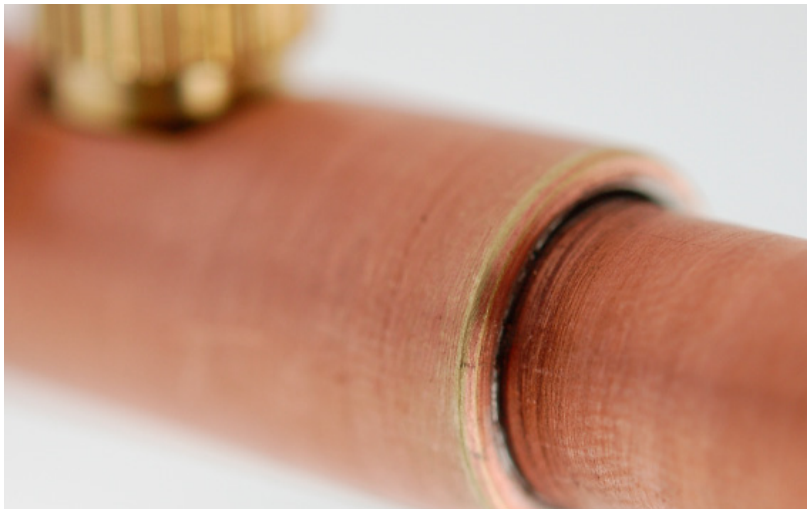

COPPER TUBING

Model	Description	Size
92800	Rigid Type L Copper	20' Length, 3/8" O.D.
92961	Prefabricated Tubing	10.5' Length, 3/8" O.D., 18" Nozzle Spacing
92962	Prefabricated Tubing	10' Length, 3/8" O.D., 24" Nozzle Spacing
92963	Prefabricated Tubing	10' Length, 3/8" O.D., 30" Nozzle Spacing
92816	Coiled Type L Copper	3/8" O.D. X 50' Coil
92817	Coiled Type L Copper	1/4" O.D. X 50' Coil
93643	Prefabricated Tubing With FogDeck Fitting	10.5' Length, 3/8" O.D., 18" Nozzle Spacing
93644	Prefabricated Tubing With FogDeck Fitting	10' Length, 3/8" O.D., 24" Nozzle Spacing
93655	Prefabricated Tubing With FogDeck Fitting	10' Length, 3/8" O.D., 30" Nozzle Spacing
93601	3 Nozzle FogDeck Assembly	54" Length, 3/8" O.D. 18" Nozzle Spacing
92807	2 Hole Copper Tubing Strap	3/8"

SOLDER FITTINGS

Model	Description	Size
92918	Fogco Nozzle T	3/8" X 3/8" X 10/24
92801	Brass Nozzle Bushing	3/8" O.D. X 10/24
92809	Female Adapter	1/4" I.D. X 10/24
92810	Male Adapter	1/4" I.D. X 10/24
93597	6" Copper Extension	10/24 X 10/24
92808	12" Copper Extension	10/24 X 10/24
92803	Copper Elbow	3/8" X 3/8"
92812	Copper 3 Way T	1/4" X 1/4" X 1/4"
92804	Copper 3 Way T	3/8" X 3/8" X 3/8"
92811	Copper Reducing T	3/8" X 3/8" X 1/4"
92813	Copper Coupling	1/4" X 1/4"
92802	Copper Coupling	3/8" X 3/8"
92805	Copper End Cap	3/8" I.D.
93604	FogDeck Brass Escutcheon Fitting	1/4" I.D. X 1024

COMPRESSION FITTINGS

Model	Description	Size
92820	Union	3/8" X 3/8"
92901	Union	1/2" X 1/2"
92821	Reducing Union	1/2" X 3/8"
92830	Reducing Union	3/8" X 1/4"
92822	3 Way T	3/8" X 3/8" X 3/8"
92903	3 Way T	1/2" X 1/2" X 1/2"
92823	Union Elbow	3/8" X 3/8"
92902	Union Elbow	1/2" X 1/2"
92825	Cross	3/8" X 3/8" X 3/8" X 3/8"
92828	Male Connector	3/8" X 1/4" NPT
92829	Male Connector	3/8" X 3/8" NPT
92826	Female Adapter	3/8" X 1/4" NPT
92827	Female Adapter	3/8" X 3/8" NPT
92831	Nut	3/8"
92832	Front Ferrule	3/8"
92833	Back Ferrule	3/8"
92834	Compression Cap	3/8"
92915	Ccompression Cap	1/2"

FILTERS & ACCESSORIES

+ Highly Recommended
+ 10" Slim Line Cannister
+ Large Capacity Cannister & Cartridges Available
+ 1µ, 5µ, and 10µ Cartridges Available

+ Water Treatment Phosphate Cartridge Available
+ Provides Optimum Contact Time
+ Consistent Dosing
+ Combines Sediment and Odor Reduction
+ IsoNet Media

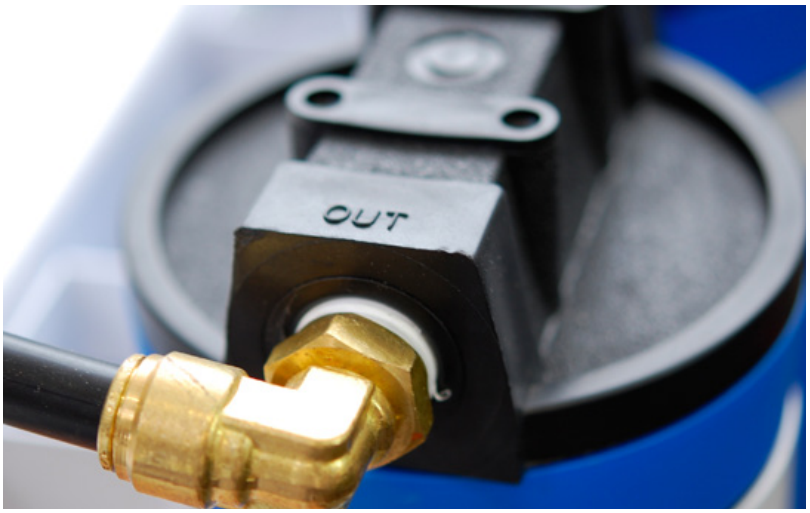

FILTERS & ACCESSORIES

Model	Description	GPM/LPM	Dimensions
10109	In-Line Calcium Inhibitor Filter	.5/2.0	2" Dia X 6 ½"
92608	9 ¾" Filter Cartridge 5µ	5/19	2 ¾" Dia X 9 ¾"
92603	9 ¾" Filter Cartridge 1µ	5/19	2 ¾" Dia X 9 ¾"
92526	9 ¾" Filter Cartridge 10µ	5/19	2 ¾" Dia X 9 ¾"
93039	9 ¾" Phosphate Cartridge	3/12	3.0" Dia X 9.625"
92609	10" Filter Housing With ½" Ports	5/19	4 ½" Dia X 12"
92611	10" Dual Filter Housing With 1" Ports	30/114	7 ½" Dia X 13"
92612	10" Dual Filter Cartridge 25µ / 1µ	15/57	4 ½" Dia X 10"
95022	Mounting Bracket For 92609		
95024	O-Ring For 92609		
95062	Filter Wrench		

FILTERS KITS & ACCESSORIES
PRE-PACKAGED KITS

+ All Inclusive
+ Convenient
+ Filtration Kits
+ Nylon, Copper, Stainless Tubing Kits
+ Specialty Mistscaping And FogDeck Kits

MINI FILTER STARTER KIT - 92600

Model	QTY	Description	Size
92544	1	Hose Adapter	¾" FGHT X ½" FNPT
92608	1	9 ¾" Filter Cartridge 5µ	2¾" X 9¾"
92609	1	10" Filter Housing With ½" Ports	4 ½" X 12"
92707	1	Slip-Lok Male Adapter	3/8" X 3/8" NPT
94130	1	Slip-Lok 45 Degree Elbow	½" X ½" MNPT
94131	1	Slip-Lok 90 Degree Swivel Elbow	½" X ½" MNPT
94132	1	Slip-Lok 90 Degree Swivel Elbow	½" X 3/8" MNPT
92855	1	Slip Lok Male Adapter	½" X ½ NPT
92853	10	Per Foot Low Pressure Tubing	½"
94150	1	Filter bracket	

PRE-TREATMENT ADD-ON FILTER KIT - 93613

Model	QTY	Description	Size
94042	1	½" Brass Nipple	½" X 3"
92609	1	10" Filter Housing With ½" Ports	4 ½" X 12"
93039	1	9 ¾" Phosphate Cartridge	3.0" Dia X 9.625"

FILTER STARTER KIT - 92000

Model	QTY	Description	Size
10103	1	Nozzzle Cleaner	8 oz.
92544	1	Hose Adapter	¾" FGHT X ½" FNPT
92608	1	9 ¾" Filter Cartridge 5µ	2¾" X 9¾"
92609	1	10" Filter Housing With ½" Ports	4 ½" X 12"
92700	1	3/8" Nylon High Pressure Tubing	50' Roll
92630	1	Slip-Lok T Nozzle Fitting	3/8" X 3/8" X 10/24
92706	1	Slip-Lok End Plug	3/8" O.D.
92707	1	Slip-Lok Male Adapter	3/8" X 3/8" NPT
92855	1	Slip-Lok Male Adapter	½" X ½" NPT
92714	5	Insulated Tubing Clamp	3/8" I.D.
94130	1	Slip-Lok 45 Degree Elbow	½" X ½" MNPT
94131	1	Slip-Lok 90 Degree Swivel Elbow	½" X ½" MNPT
94132	1	Slip-Lok 90 Degree Swivel Elbow	½" X 3/8" MNPT
92853	10	Per Foot Low Pressure Tubing	½"
93503	2	Automatic Drain Valve	10/24 Thread
94118	1	Tubing Cutter	
95062	1	Filter Wrench	
94150	1	Filter Bracket	

10’ NYLON TUBING KIT - 92001

Model	QTY	Description	Size
92630	4	Slip-Lok T Nozzle Fitting	3/8” X 3/8” X 10/24
92714	8	Insulated Tubing Clamp	3/8” I.D.
92713	4	High Pressure Nylon	30” Straight Length
93512	4	Brass/Stainless Standard Nozzle	.012”/.3mm Orifice

10’ COPPER TUBING KIT - 92002

Model	QTY	Description	Size
92963	1	Pre-Fabricated Copper Line	3/8” X 10’ With 30” Spacing
92714	8	Insulated Tubing Clamp	3/8” I.D.
92820	1	Brass Compression Union	3/8” X 3/8”
93512	4	Brass/Stainless Standard Nozzle	.012”/.3mm Orifice

10’ STAINLESS TUBING KIT - 92003

Model	QTY	Description	Size
93081	1	Pre-Fabricated Stainless Steel Line	3/8” X 10’ With 30” Spacing
92714	8	Insulated Tubing Clamp	3/8” I.D.
92820	1	Brass Compression Union	3/8” X 3/8”
93512	4	Brass/Stainless Standard Nozzle	.012”/.3mm Orifice

5 NOZZLE MISTSCAPING® KIT - 92004

Model	QTY	Description	Size
92706	1	Slip-Lok End Plug	3/8" O.D.
93225	5	30" Mistscaping Riser	3/8" Slip-Lok X 3/8" Slip-Lok X 10/24
93512	5	Brass/Stainless Standard Nozzle	.012"/.3mm Orifice

3 NOZZLE FOGDECK® ASSEMBLY KIT - 93602

Model	QTY	Description	Size
93601	1	3 Nozzle FogDeck Assembly	54" Length, 3/8" O.D. 18" Spacing
93603	3	FogDeck Threaded Plug Assembly	10/24 Thread
93605	3	Escutcheon Plug	.6" O.D.
80450	3	Brass/Stainless Nozzle	10/24 Thread, .016" Orifice
92802	1	Copper Coupling	3/8" X 3/8"

VALVES & MISCELLANEOUS

VALVES

Model	Description	Size
94162	HP Stainless Steel Electric 3/2 Valve NO, NC	"3/8"" FNPT"
95000	HP Stainless Steel Electric NC Valve Body	"1/4"" FNPT"
95001	HP Stainless Steel Electric NO Valve Body	"1/4"" FNPT"
95002	Electric DIN Connector	N/A
95003	24VAC Coil	N/A
95004	115VAC Coil	N/A
95005	230VAC Coil	N/A
92631	Stainless Steel Ball Valve	"1/4"" FNPT"
92632	Stainless Steel Ball Valve	"3/8"" FNPT"

MISCELLANEOUS

Model	Description	Size
94001	1500 PSI Discharge Hose - Foot	"1/4"" I.D."
94144	HP Male Adapter	"1/4"" Barb X 1/4"" MNPT"
94145	HP Female Swivel Adapter	"1/4"" Barb X 1/4"" FNPT"
92715	Pump Pad	"24"" X 24""
93222	Industrial Pump Oil	16 Ounce
10103	Nozzle Cleaner	8 Ounce
92597	Nozzle Cleaner	1 Gallon
92710	Tubing Cutter	"up to 1""